

"Express Mail" mailing label number **EL 228 576 354 US.**

Postage Deposit **August 6, 1999**

Case No. 5050/584

PATENT APPLICATION TRANSMITTAL LETTER

Assistant Commissioner for Patents:

Transmitted herewith for filing is the patent application of: John A. Hossack, Linyong Pang, Thilaka S. Sumanaweera for: Medical Diagnostic Ultrasonic Imaging Method and System for Displaying Multi-Phase, Multi-Frame Images. Enclosed are:

- ☒ 5 sheet(s) of drawings, 14 pages of application (including title page), and the following Appendices : ____.
- ☒ Declaration.
- ☒ Power of Attorney.
- ☐ Verified statement to establish small entity status under 37 CFR §§ 1.9 and 1.27.
- ☒ Assignment transmittal letter and Assignment of the invention to : Acuson Corporation.
- ☒ Check for \$40.

15510 U.S. PRO
09 369510
08/06/99

Claims as Filed	Col. 1	Col. 2
For	No. Filed	No. Extra
Basic Fee		
Total Claims	16-20	0
Indep. Claims	4-3	1
Multiple Dependent Claims Present		

*If the difference in col. 1 is less than zero, enter "0" in col. 2.

Small Entity

Rate	Fee
	\$ 380
x\$9=	\$
x\$39=	\$
+\$130=	\$
Total	\$

or
or
or
or
or
or


Other Than Small Entity

Rate	Fee
	\$ 760
x\$18=	\$0
x\$78=	\$78
+\$260=	\$
Total	\$838

- ☐ Please charge my Deposit Account No. 23-1925 in the amount of \$: _____. A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$: 838 to cover the filing fee is enclosed.
- ☒ The Assistant Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR § 1.16.
- ☒ Any patent application processing fees under 37 CFR § 1.17.
- ☐ The Assistant Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☐ Any filing fees under 37 CFR § 1.16 for presentation of extra claims.
- ☐ Any patent application processing fees under 37 CFR § 1.17.
- ☐ The issue fee set in 37 CFR § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR § 1.311(b).

Date

8-6-99


William A. Webb
BRINKS HOFER GILSON & LIONE
Registration No. 28,277

"Express Mail" mailing label number _____

Date of Deposit: _____

Our Case No. 5050/584

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTORS:

JOHN A. HOSSACK
LINYONG PANG
THILAKA S. SUMANAWEEA

TITLE:

MEDICAL DIAGNOSTIC
ULTRASONIC IMAGING METHOD
AND SYSTEM FOR DISPLAYING
MULTI-PHASE, MULTI-FRAME
IMAGES

ATTORNEY:

WILLIAM A. WEBB
BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200

MEDICAL DIAGNOSTIC ULTRASONIC IMAGING METHOD AND SYSTEM FOR DISPLAYING MULTI-PHASE, MULTI-FRAME IMAGES

BACKGROUND

This invention relates generally to medical diagnostic ultrasonic imaging techniques, and in particular to such imaging techniques that provide multiple images displayed in sequence, wherein each image is associated with a respective phase of a physiological cycle.

U.S. Patent Application Serial No. 08/916,585, filed August 22, 1997, discloses a system for collecting single frames of image data from each of a plurality of spatial locations. Tracking information is collected with each frame, and this tracking information is used to assemble the frames into a static three-dimensional image or an extended field of view image. In three-dimensional imaging, the transducer probe is swept across a three-dimensional volume, and the tracking data is obtained along tracking planes oriented generally transverse to the image planes. In extended field of view imaging, the transducer probe is maintained within a plane such that multiple image frames are obtained in the same plane. The tracking information is then used to reconstruct an extended (typically elongated) field of view from multiple ones of the coplanar images. In both cases, the three-dimensional image or the extended field of view image is a static image. The entirety of the above-identified U.S. Patent Application Serial No. 08/916,585 is hereby incorporated by its reference for its teaching of techniques for forming three-dimensional images and extended field of view images.

It is also known to acquire image frames from a particular part of the cardiac cycle. This can be done by triggering image acquisition at a specified time duration after a particular feature of the ECG signal, such as the R wave.

BRIEF SUMMARY

The present invention is defined by the following claims, and nothing in this section should be taken as a limitation on these claims.

By way of introduction, the preferred embodiments described below acquire image data for multiple frames at a plurality of transducer positions. Each frame is identified with a respective phase of a physiological cycle such as the heart cycle, and a multi-frame image data set is then formed from the acquired frames. This data set may be a multiphase three-dimensional data set or alternatively a multiphase extended field of view data set. Then multiple images are generated from the three-dimensional data set or the extended field of view data set, each image associated with a respective phase of the physiological cycle. These images are then displayed in sequence to a user. In this way the user obtains the advantage of multi-frame imaging (three-dimensional imaging or extended field of view imaging), along with the advantage of a display that sequentially shows the selected view for a sequence of phases of the physiological cycle.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a flow chart of a method that incorporates a first preferred embodiment of this invention.

FIG. 2 is a schematic diagram illustrating a multiphase 3-D data set created using the method of FIG. 1.

FIGS. 3 and 4 are schematic diagrams of alternative embodiments for practicing the method of Figure 1.

FIG. 5 is a flow chart of a method that incorporates a second preferred embodiment of this invention.

FIG. 6 is a schematic diagram of a multiphase extended field of view data set created using the method of Figure 5.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

Turning now to the drawings, the method illustrated in FIG. 1 initially acquires image data for N frames at each of a plurality of transducer positions, wherein each frame is identified with a respective phase of a physiological cycle and N is greater than or equal to 2 (block 10). In one example, the image frames acquired in block 10 are each identified with a

respective phase of an ECG signal. Typically, 10 to 25 frames of image data are acquired at each transducer position for each cardiac cycle. This represents a balance between computational requirements and adequate display of a moving image. For simplicity, the following example will consider the case where N equals 10, and 10 image data frames are collected for each transducer position. If the average ECG period is 1000 ms, this represents an interval of about 100 ms between consecutive frames of acquired image data. In general, it is preferable to acquire a large number of frames per heart cycle, but this will often lead to a large amount of data requiring a great deal of memory. The image data preferably comprises one or more of B-mode, color Doppler velocity, and color Doppler energy information.

In block 12 of the method of Figure 1, the image data is used to construct a multiphase 3-D data set. That is, respective image data frames are associated with corresponding positions and phases with respect to a physiological cycle (e.g., the heart cycle as indicated by an ECG signal) in the 3-D data set.

FIG. 2 shows a schematic representation of the multiphase 3-D data set in which a plurality of frames 20 have been positioned within a three-dimensional volume 22. Each frame includes a plurality of data points, and the point P1 is indicated. P1 includes the data for point 1 for each of the N phases ϕ_1 through ϕ_N , as schematically shown in FIG. 2.

In block 14 of Figure 1, a series of L views is selected. L is an integer greater than zero, and the term "series" is intended broadly to cover one or more views. Typically, each view may be an arbitrarily positioned plane within a three-dimensional space. For example, each view may be slightly displaced from the previous view when $L > 1$. Alternately, the selected view or views can be those appropriate for a surface rendering, a volume projection such as a maximum intensity projection, or multiple orthogonal slices.

In block 16, M images are generated from the 3-D data set for each of the selected views, each image associated with a respective phase with respect to a physiological signal. The same viewing calculation (e.g. extracting a two-dimensional view from the three-dimensional data set) is

performed on the separate phases for each phase of the physiological cycle stored in the data set (10 in this example). This is repeated for all of the views.

In block 18, the M images for a given view are displayed in sequence to a user. This can be done by playing the M images sequentially on a video display at a frame rate equivalent to the acquisition rate. For example, if the phases are acquired at 100 ms intervals, then the output can be displayed at 100 ms intervals between consecutive frames. Preferably, the user is provided with means (not shown) for directing the system to play the images back at a faster or slower rate if desired, or to pick out static frames from the sequence. Alternately, the user of the system can change the view while cycling through the M cardiac phases. The user will perceive a pulsating object while the view is changing.

FIG. 3 shows a block diagram of a medical diagnostic imaging system suitable for implementing the method of FIG. 1. The system illustrated in FIG. 3 is closely related to that disclosed in the above-identified U.S. Patent Application Serial No. 08/916,585, and that application should be consulted for further details of operation.

Briefly, the system 30 includes a transducer probe 32 having an image transducer array 34 and first and second tracking transducer arrays 36, 38. Preferably, the tracking transducer arrays 36, 38 are oriented at right angles to the image transducer array 34.

The transducer probe 32 is connected to a transmit/receive beamformer 40 which is in turn coupled to a scan converter 42 and an output display 44. An ECG module 46 provides a signal indicative of the ECG cycle to a system controller 48.

The system controller 48 controls the beamformer 40 and the scan converter 42 to generate image data that is stored in a memory 50 and tracking data that is stored in memories 52 and 54.

In this example 10 frames of image data are stored in the memory 50 for each spatial position of the transducer probe, and each frame is time stamped with the respective phase with respect to the heart cycle. Tracking

data is stored in memories 52 and 54 only for the first frame of each set of frames associated with a single position. Typically, the first frame in each set ($t = 0$ in FIG. 3) is phased to a stable portion of the heart cycle, such as 30 milliseconds after the R wave. Of course, instead of the first frame after the R wave, position information may be stored for any desired phase of the heart cycle.

A motion estimator 56 estimates frame-to-frame motion, using the techniques described at length in U.S. Patent Application Serial No. 08/916,585. In this case, one motion estimate determined from the selected phase is used for all phases of the cardiac cycle associated with the respective position. For example, all frames for position 1 are associated with the same estimate of motion that is determined for position 1 using the tracking data for $t = 0$. This is believed to be a good approximation that saves a considerable amount of computational time. In some applications speckle may become decorrelated, and this may affect motion estimation accuracy. Therefore, in an alternate preferred embodiment, all frames are used to estimate motion. Motion estimates obtained by the motion estimator 56 are provided to a motion vector smoother 58, and the smoothed motion vectors are used to determine frame-to-frame vector motion in block 60. Computer 62 uses these frame-to-frame motion vectors to register the image data from the memory 50, as shown by way of example in FIG. 2. That is, the position information obtained from the block 60 is used to register the image data from the memory 50 by means of standard three-dimensional image interpolation. In this way the desired multiphase three-dimensional data set is constructed from the image data and is stored in the memory 64.

The user selects one or more views, and the computer 62 performs the necessary display processing to generate a plurality of images from the 3-D data set for each selected view, each image associated with the respective phase of the physiological cycle. These images are then displayed in sequence to a user on a display 66.

FIG. 4 shows an alternative, preferred embodiment that is similar to the embodiment of FIG. 3, except that the embodiment of FIG. 4 stores tracking

data for frames of each phase. In this way tracking data is stored for all frames, not a subset of frames. The 3-D volume filling computer 62 creates a separate three-dimensional data set for each separate respective phase from the two-dimensional image frames associated with that phase, and the N separate 3-D data sets, taken together, can be considered a multi-phase 3-D data set. In other respects the embodiment of FIG. 4 operates similarly to that described above in conjunction with FIG. 3.

The foregoing discussion is related to three-dimensional data set embodiments of this invention. Other implementations of the invention relate to extended field of view imaging. As shown in FIG. 5, one preferred method acquires image data for N frames at each of a plurality of transducer positions, each frame identified with a respective phase of a physiological cycle. In this case the separate frames are coplanar. Next, M extended field of view images are generated from the image data, each image associated with a respective phase. Finally, the M images are presented in sequence to a user.

FIG. 6 is a schematic diagram showing the manner in which three frames 70, 72, 74 are combined to produce an extended field of view. The cross-hatched fractions of the frame 72 and the frame 74 are combined with the cross-hatched portion of the frame 70 to produce an extended field of view that is elongated as compared to any one of the image frames. As shown in FIG. 6, the extended field of view data set is a multiphase data set in the sense that for each point, such as the point P2, image data is provided for each of N separate phases ϕ_1 , ϕ_2 , ϕ_3 , . . . ϕ_N .

This alternative embodiment can be implemented in a manner similar to that described above in conjunction with FIGS. 3 and 4. In this case, the tracking data (which may be obtained from the image data) is preferably obtained in the same plane as the image data. The computer 62 forms the extended field of view data set including image information for each of the selected phases of the physiological cycle. The computer 62 then generates a sequence of extended field of view images from the image data, each

extended field of view image associated with the respective phase of the physiological cycle.

Of course, many alternatives are possible to the preferred embodiments described above. For example, in some ultrasound systems an ECG signal is not available. One alternative for extracting a cardiac time reference is to detect the frame in which maximum Doppler flow velocity or energy is detected, for example by summing all energy levels for all color pixels and then dividing by the number of color pixels to derive mean energy. In this approach it is preferable to use a fast acquisition rate for detecting the maximum Doppler flow rate (such as 20 frames per second or higher). Regardless of the frame rate that is used for the purpose of detecting the Doppler flow maximum, only a subset of frames is preferably used for generating the multiphase 3-D data set or the multiphase extended field of view data set.

In the foregoing discussion, for both 3-D multiphasic imaging and for 2-D extended field of view multiphasic imaging, N frames are acquired for each of the plurality of transducer positions, each frame corresponding to a body cycle phase. In the more general case, the transducer can be continually moved while N frames are acquired. Furthermore, the number of frames acquired for successive body cycles may be different. Since the time stamp for the beginning of the body cycle (R-wave, for example) and the time stamps for each acquired images are known using the previously described means, M images, each associated with a respective phase of the body cycle, can still be generated.

Furthermore, this invention is not limited to use with cardiac cycles. Rather, it is well suited for use with a wide variety of physiological cycles, including the respiratory cycle.

As used herein, the term "multi-frame" as applied to a data set or an image means that data from two or more separate frames contribute to the data set or image. Though possible, it is not required that two or more entire frames contribute to the data set or image.

It should be apparent from the foregoing that a dynamic, multi-frame image display has been described which exhibits the advantages of three-dimensional imaging or extended field of view imaging in combination with the ability to acquire and present data from a sequence of phases of the selected physiological cycle.

The foregoing detailed description has described only a few of the many forms that this invention can take. For this reason this detailed description is intended by way of illustration and not by way of limitation. It is only the following claims, including all equivalents, that are intended to define the scope of this invention.

CLAIMS

1. A medical diagnostic ultrasound imaging method comprising:
 - (a) acquiring image data for at least two frames, each frame identified with a respective phase of a physiological cycle;
 - (b) constructing a multi-phase, multi-frame data set from the image data by registering the image data based on image motion between the frames,
 - (c) generating a plurality of images from the multi-frame data set, each image associated with a respective phase of the physiological cycle; and
 - (d) displaying the images in sequence to a user.
2. The method of Claim 1 wherein (b) comprises:
 - (b1) associating a separate position with each frame of image data; and
 - (b2) creating a plurality of separate multi-frame data sets included in the multi-phase, multi-frame data set, each separate multi-frame data set identified with a respective phase of the physiological cycle.
3. The method of Claim 1 wherein (b) comprises:
 - (b1) associating a separate position with each frame of image data associated with one selected phase of the physiological cycle; and
 - (b2) using the positions associated with the one selected phase of the physiological cycle to create the multi-frame, multi-phase data set for all of the image data.
4. The method of Claim 1 wherein the multi-phase, multi-frame data set constructed in (b) comprises a 3-D data set.
5. The method of Claim 1 wherein the multi-phase, multi-frame data set constructed in (b) comprises an extended field of view data set.
6. A medical diagnostic ultrasound imaging means comprising:

means for acquiring image data for at least two frames, each frame identified with a respective phase of a physiological cycle;

means for constructing a multi-phase, multi-frame data set from the image data, said constructing means comprising means for registering the image data based on image motion between frames;

means for generating a plurality of images from the multi-frame data set, each image associated with a respective phase of the physiological cycle; and

means for displaying the images in sequence to a user.

7. The invention of Claim 6 wherein the constructing means comprises:

means for associating a separate position with each frame of image data; and

means for creating a plurality of separate multi-frame data sets included in the multi-phase, multi-frame data set, each separate multi-frame data set identified with a respective phase of the physiological cycle.

8. The invention of Claim 6 wherein the constructing means comprises:

means for associating a separate position with each frame of image data associated with one selected phase of the physiological cycle; and

means for using the positions associated with the one selected phase of the physiological cycle to create the multi-phase, multi-frame data set for all of the image data.

9. The invention of Claim 6 wherein the multi-phase, multi-frame data set comprises a 3-D data set.

10. The invention of Claim 6 wherein the multi-phase, multi-frame data set comprises an extended field of view data set.

11. A medical diagnostic ultrasound imaging method comprising:

(a) acquiring image data for at least two frames, each frame identified with a respective phase of a physiological cycle;

(b) generating a plurality of extended field of view images from the image data, each image associated with a respective phase of the physiological cycle; and

(c) displaying the images in sequence to a user.

12. The method of Claim 11 wherein (b) comprises:

(b1) associating a separate position with each frame of image data; and

(b2) creating a plurality of separate extended field of view data sets, each data set identified with a respective phase of the physiological cycle.

13. The method of Claim 11 wherein (b) comprises:

(b1) associating a separate position with each frame of image data associated with one selected phase of the physiological cycle; and

(b2) using the positions associated with the one selected phase of the physiological cycle to create the multi-phase extended field of view data set for all of the image data.

14. A medical diagnostic ultrasound imaging system comprising:

(a) means for acquiring image data for at least two frames, each frame identified with a respective phase of a physiological cycle;

(b) means for generating a plurality of extended field of view images from the image data, each image associated with a respective phase of the physiological cycle; and

(c) means for displaying the images in sequence to a user.

15. The invention of Claim 14 wherein the generating means comprises:

means for associating a separate position with each frame of image data; and

5

10

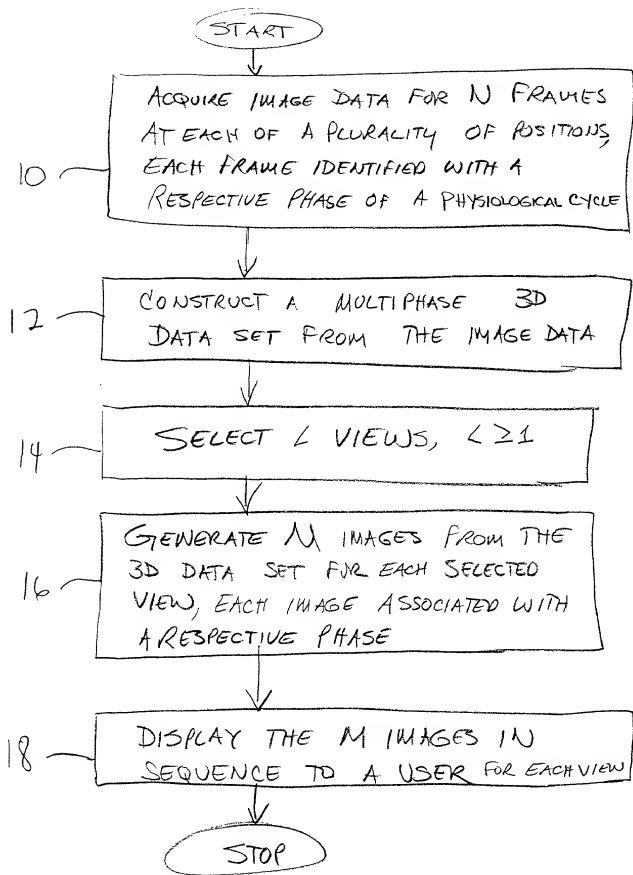
means for using the positions associated with the one selected phase of the physiological cycle to create a multi-phase extended field of view data set for all of the image data.

ABSTRACT OF THE DISCLOSURE

A medical diagnostic ultrasonic imaging system acquires image data for at least two frames at each of multiple positions, each frame identified with a respective phase of a physiological cycle. A multiphase 3-D or extended field of view data set is constructed from the image data. Then a plurality of images are generated from the multiphase data set. Each image is associated with a respective phase of the physiological cycle, and these images are displayed in sequence to a user.

5

0936510-060699

Fig 1

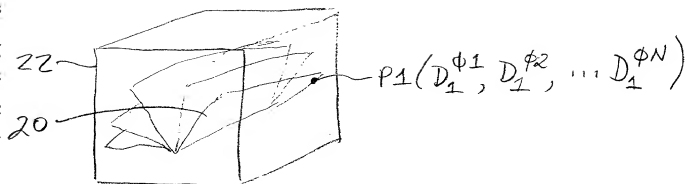

$$p_1(D_1^{\phi_1}, D_1^{\phi_2}, \dots, D_1^{\phi_N})$$

FIG 2

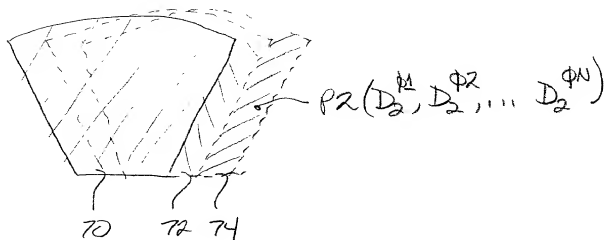
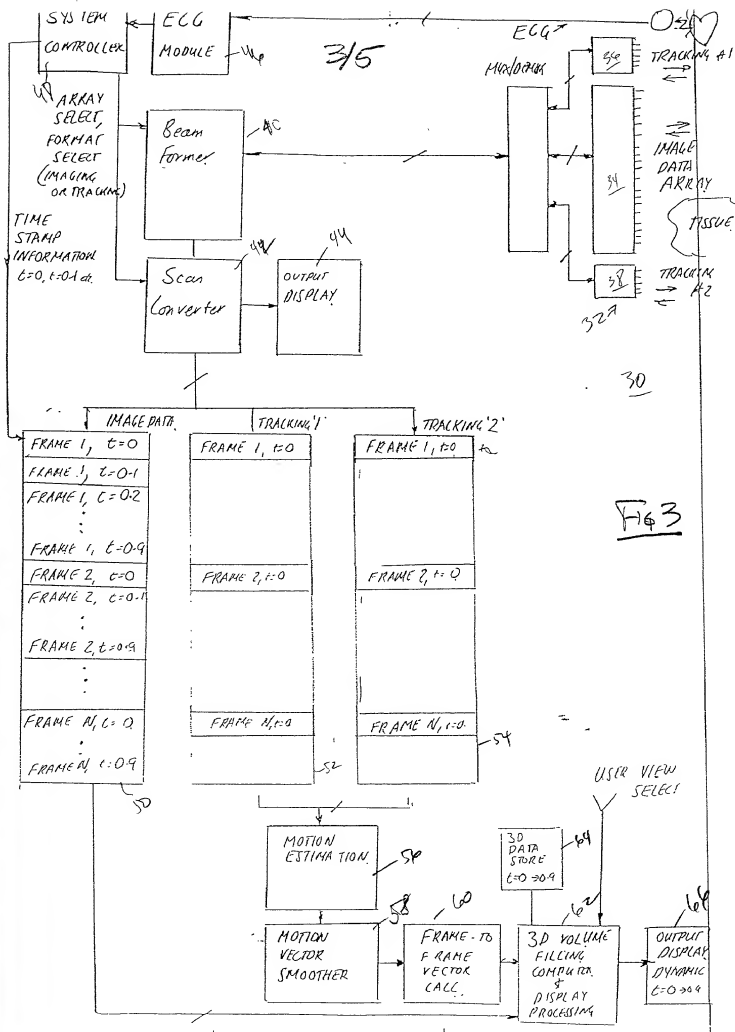

$$\rho_2(D_2^{\phi_1}, D_2^{\phi_2}, \dots, D_2^{\phi_N})$$

FIG 6



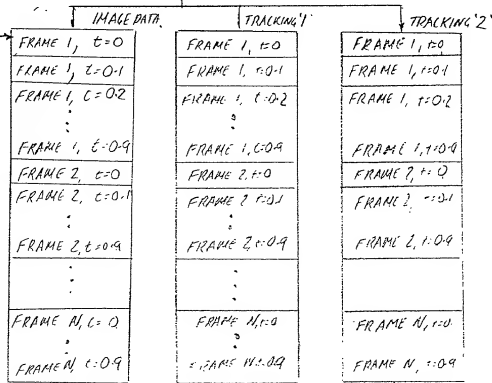
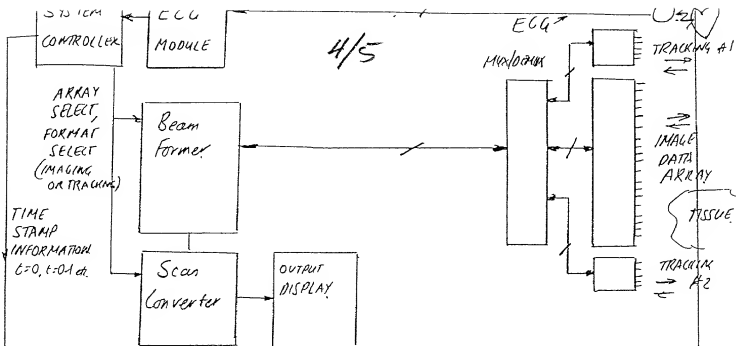
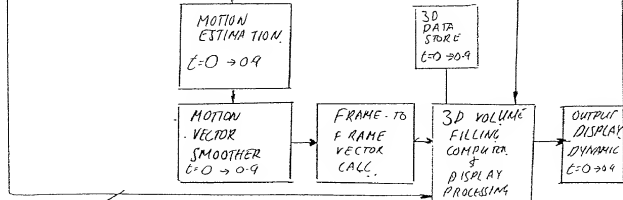
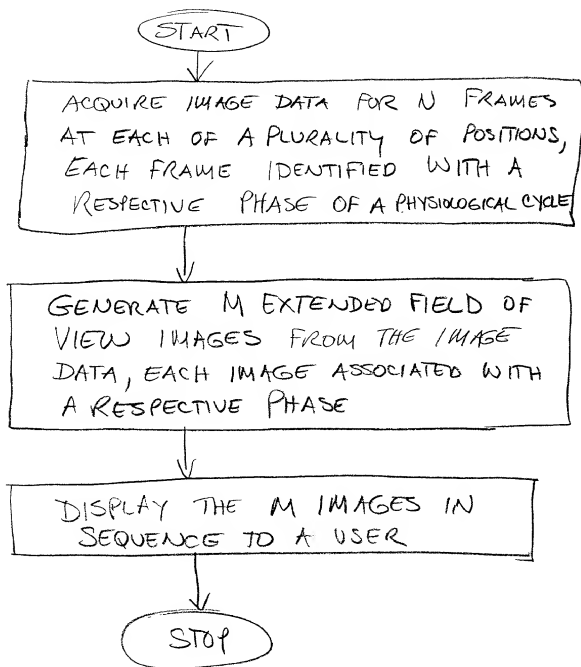


Fig 4



5/5

5050/1586

FIG 5

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Medical Diagnostic Ultrasonic Imaging Method and System for Displaying Multi-Phase, Multi-Frame Images, the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____.
☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

None			<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

60/114,194	12-30-98
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

None		None
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Signature

Date: Aug 2 1999

Full name of sole or first inventor

John A. Hossack

Residence

Palo Alto, California

Citizenship

United Kingdom

Post Office Address

144 Emerson Street, Apartment E, Palo Alto, California 94301

BRINKS HOFER GILSON & LIONE

P.O. Box 10395
Chicago, IL 60610
(312) 321-4200

Inventor's Signature
Full name of second joint inventor, if any
Residence
Citizenship
Post Office Address


Linyong Pang

Date:


8/3/99

Stanford, California

China

P.O. Box 8030, Stanford, California 94309

Inventor's Signature
Full name of third joint inventor
Residence
Citizenship
Post Office Address


Tanaka S. Sumanaweera

Date:

7/30/99

San Jose, California

Sri Lanka

5110 Northlawn Drive, San Jose, California 95130

rev. Nov. -98

F:\common\waw\5050-584 Declaration.doc

00369510-000699

Inventor(s): John A. Hossack, Linyong Pang, Thilaka S. SumanaweeraTitle: Medical Diagnostic Ultrasonic Imaging Method and System for Displaying Multi-Phase, Multi-Frame Images**POWER OF ATTORNEY**

The specification of the above-identified patent application:

☒ is attached hereto
☐ was filed on, as application Serial No.

I hereby revoke all previously granted powers of attorney in the above-identified patent application and appoint the following attorneys to prosecute said patent application and to transact all business in the Patent and Trademark Office connected therewith:

William A. Webb	(28,277)
Craig A. Summerfield	(37,947)
Joseph F. Hetz	(41,070)
Liza K. Toth	(31,065)

Please address all correspondence and telephone calls to William A. Webb in care of:

Brinks Hofer Gilson & Lione
 P.O. Box 10395
 Chicago, IL 60610
 (312)321-4200

The undersigned hereby authorizes the U.S. attorneys named herein to accept and follow instructions from Liza K. Toth as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by the undersigned.

Acuson Corporation, a corporation of Delaware, certifies that it is the assignee of the entire right, title and interest in the patent application identified above by virtue of either:

- ☒ An assignment from the inventor(s) of the patent application identified above, a copy of which is attached hereto.
 OR
☐ An assignment from the inventor(s) of the patent application identified above. The assignment was recorded in the Patent and Trademark Office at Reel , frame .
 OR
☐ A chain of title from the inventor(s), of the patent application identified above, to the current assignee as shown below:


- From To:
The document was recorded in the Patent and Trademark Office at Reel , frame , or a copy thereof is attached.
- From To:
The document was recorded in the Patent and Trademark Office at Reel , frame , or a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet.

The undersigned has reviewed the assignment or all the documents in the chain of title of the patent application identified above and, to the best of undersigned's knowledge and belief, title is in the assignee identified above.

The undersigned (whose title is supplied below) is empowered to act on behalf of the assignee.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements are made with the knowledge that willful false statements, and the like so made, are punishable by fine or imprisonment, or both, under Section 1001, Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature  Date: 8/3/99
 Name: Charles H. Dearborn
 Title: Vice President, General Counsel and Secretary

RECEIVED BY MAIL